


DIN 961	ISO 8676	8.8
----------------	-----------------	------------



Standard withdrawn

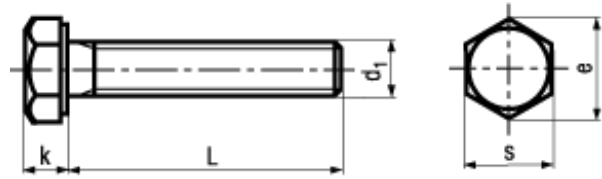

BN 65
Hex head screws
fully threaded, with metric fine thread
Steel 8.8
black
• ~UNI 5740

M10; M12; M14; M22: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
1055666	M8x1	14,38	5,3	13	16
1055682					20
1055704					25
1055712					30
3092077					35
1808427	M10x1	18,9	6,4	17	20
1808443					25
1808451					30
1808478					35
3092734					40
1055828	M10x1,25	18,9	6,4	17	18
1055836					20
1055844					(22)
1055852					25
1055860					30
1055879					35
3059338					40
1055984	M12x1,25	21,1	7,5	19	20
1055992					25
1056018					30
1056026					35
1056034					40

M10; M12; M14; M22: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
1808486	M12x1,5	21,1	7,5	19	20
1808494					25
1808508					30
1808516					35
1808524					40
1056123	(M14x1,5)	24,49	8,8	22	25
1056131					30
1056158					35
1056166					40
1056174					45
1056247	M16x1,5	26,75	10	24	30
1056255					35
1056263					40
1056271					45
1056298					50
1056360	(M18x1,5)	30,14	11,5	27	40
1056379					50
1056441	M20x1,5	33,53	12,5	30	40
1056468					45
1056476					50
1056484					60
1056530	(M22x1,5)	35,72	14	32	50
1056549					60
1056603	M24x2	39,98	15	36	50
1056611					60
1056638					70